




BESS BRANTS

Design: LeTourneau Technologies Super 116E-PB Class Jackup

Built: Consorsio Rio Paraguacu Sao Roque, Brazil

Year Built / Last Upgrade: 2012 / 2019

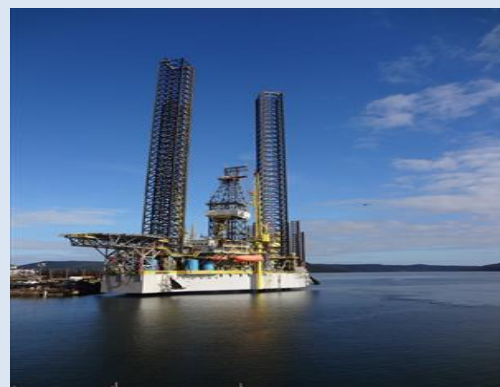

Premium Jackup

General Description

Classification	ABS, A1 Self-elevating Drilling Unit.
Flag	Marshall Islands.
Overall Dimensions (Hull)	243 ft. long x 206 ft. wide x 26 ft. deep.
Legs	3 x 477.47 ft. long, Square.
Longitudinal Leg Centers	129 ft.
Transverse Leg Centers	142 ft.
Drafts	18.35 ft. load line draft.
Accommodation	110 persons.
Displacement	29,870 kips operating.
Variable Deck Load	6,457 kips operating / 4,508 kips. transit.
Transit Speed	Average 3 knots (min.300 kips combined bollard pull).
Operating Water Depth	350 ft.
Maximum Drilling Depth	30,000 ft.

Drilling Equipment

Derrick	Loadmaster 35 ft. x 32 ft. Base, 170 ft.
Hook load Capacity	1,500,000 lbs. on 14 Lines static hook load capacity.
Top Drive	Letourneau DDTD-750-V2 750 tones, 1575 hp AC Motor, Output torque 72,000 ft lbs.
Cantilever / Drill Floor	70 ft aft of Transom.
Travelling Block	Letourneau TB-750, Capacity 750 tons.
Crown Block	Loadmaster C150016x14-11NC, Capacity 1,000 tons.
Drawworks	Letourneau LDW-1500K, Driven by (3) 1,500 hp AC Motors with 1-5/8-inch Drill Line.
Auxiliary Brake	N/A.
Rotary Table	Letourneau L-495, 49-1/2-inch, Capacity 1,250 tons. Driven by (1) OEM 1,150 hp AC Motor.
Cementing Eqpt.	Baker Hughes Seahawk Unit.
Torque Wrench	NOV ST-120 Iron Roughneck, (1) 950 Hydril Hawk Spinner

Mud System

Mud Pumps	(3) Letourneau Model W-2215, Triplex, Driven by (2) OEM 1150 hp AC motors.
HP Mud System	Rated for 7,500 psi.
Mud Pits	3,512 bbls total, (6) Mud Pits (2) Slug Pits.
Desanders & Desilters	(1) NOV Desander with 3x12" cones, (1) NOV Desilter with 24x4" cones.
Degasser	(1) NOV Model DG-10, 1,000 gpm.
Shale Shakers	(5) NOV Brandt King Cobra shakers, 700 gpm.

Storage Capacities

Fuel Oil	1,994 bbls.
Liquid Mud	3,512 bbls
Drill Water	19,094 bbls (Incl. combo tanks).
Potable Water	2,057 bbls.
Bulk Material	(Barite/Bentonite + Cement) 12,000 cu.ft.
Sack Storage	775 sq.ft.
Pipe Storage (Main)	1,400 sq. ft x 7 ft. high.
Pipe Storage (Cantilever)	2,000 sq. ft x 7 ft. high.

BOP & Well Control

BOP	(1) 13-5/8" 10K (2ea Double). (1) 21-1/4" 2K & 30" 1K Annular.
BOP Handling	(2) Ingersoll Rand winches Model 75 tons each hoist.
Diverter	Vetco Grey Model KFDJ 500 psi.
Control Unit	Cameron 3k psi BOP Control Unit 15 gal. bottles with reservoir tank capacity 600 gal.
Choke Manifold	4-1/16" 10k Upstream x 4-1/16" 5K Downstream

Power & Machinery

Main Power	(5) Caterpillar 3516CHD diesel engines rated 2,150 hp (5) KATO 6P6.6-3200HR Generator rated 1,525 kw.
Emergency Power	(1)Caterpillar 3512CHD diesel engine rated 1,476 hp (1) KATO 6P6-2900 Generator rated 1,280 kw.

Cranes

Deck Cranes	(3) Letourneau PCM-220 SS Pedestal Cranes, SWL 75 tons,
--------------------	---

Special Features & Other Information

Helideck	D 22.2 M, SWL 12.8 t.
Jacking	5 pinions per chord, 4 x chords per leg, 600 kips per pinion for holding capacity and 361 kips per pinion for jacking capacity.

DAT-ENG-ARO-084-20-002-R2



These specifications are intended for general reference purposes only, as actual equipment and specifications may vary based upon subsequent changes, the contract situation and customer needs. All equipment shall be operated and maintained at all times, in compliance with ARO Drilling standard operating manuals, policies and procedures, and within its stated operational limits or continuous rated capacity, in order to assure maximum operational efficiency.

